



# ISADX 4260

(single leaf)



## Timber Acoustic & Fire Rated Doorsets

### Door Leaf

- Huet multi-layer acoustic core
- Thickness: 64mm hardwood stiles all round
- High stability leaf due to the inclusion of 2 steel sheets

### Door Frame

- Hardwood
- Rebated monoblock frame
- Variety of widths
- Extension linings available
- Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

### Choice of Door Facings

- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

### Ironmongery

- 4 lift-off hinges - 160 x 90mm black or chrome plated
- Cut-outs/mortices are available to suit a variety of locks and handles
- Cut-outs/mortices are available to suit a large choice of electromagnetic lock
- Spy hole
- Concealed door closer available: DORMA ITS96

### Perimeter Seals

- Intumescent seals factory fitted (within the frame and leaf)
- Combined smoke and acoustic seals fitted within the frame
- Thresholds selection



Rw 42dB

CSTB AC98. 159



EI60 FD60

EITHER SIDE - BS EN 1634-1: 2000




3c Stability\* NF EN 12219




Smoke Seal

S<sub>a</sub> Classification


EN 13501-2 - BS EN 1634-3




400x300




Ø360



1200x200



1200x300



1200x400

\*Stability of the door leaf is an important factor, particularly in areas of temperature variance between rooms or between rooms and corridors. Any distortion of the door leaf will result in the seals not functioning correctly. With the inclusion of a minimum of 2 steel sheets and other materials, Huet door leaves offer less than 2mm of distortion. The result is a door leaf and seal which continues to perform even with wide temperature differences.

**HUET**  
HIGH PERFORMANCE DOORS

Tel: +33 22 812 0413  
Rgd Office: JH INDUSTRIES  
30 rue Pauline de Lézardière  
85300 Challans FRANCE  
[www.huet-doors.co.uk](http://www.huet-doors.co.uk)

**Varilux**

Tel: +27 21 852 1716  
W.R Quinan Boulevard, Paardevlei,  
Somerset West Western Cape, SOUTH AFRICA  
[sales@varilux.co.za](mailto:sales@varilux.co.za)  
[www.varilux.co.za](http://www.varilux.co.za)



All sizes are in mm  
FEBRUARY 2020




# ISADX 4260


(single leaf)




## Timber Acoustic & Fire Rated Doorsets

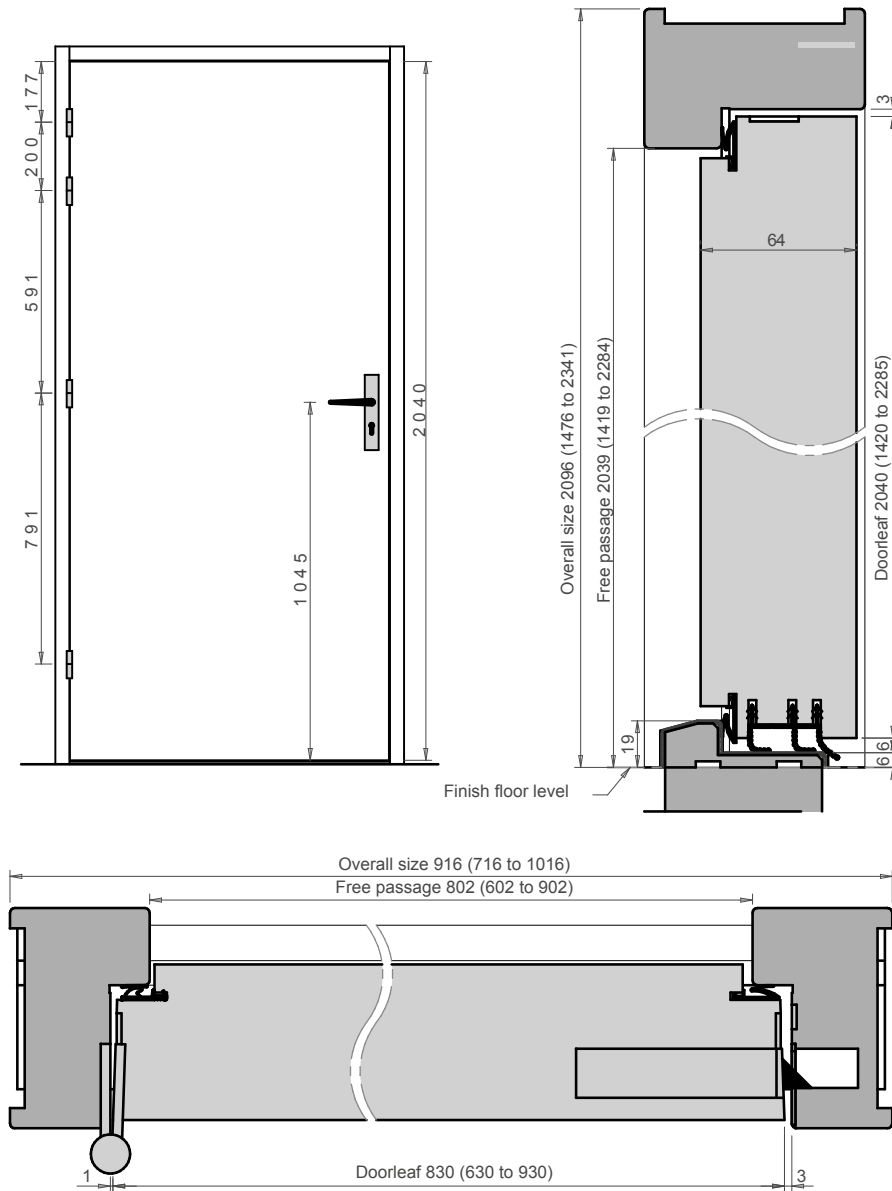

Pyramidal threshold 67x15



Swiss threshold 67x19



Tel: +33 22 812 0413  
Rgd Office: JH INDUSTRIES  
30 rue Pauline de Lézardière  
85300 Challans FRANCE  
www.huet-doors.co.uk



Tel: +27 21 852 1716  
W.R Quinan Boulevard, Paardevlei,  
Somerset West Western Cape, SOUTH AFRICA  
sales@varilux.co.za  
www.varilux.co.za

All sizes are in mm  
FEBRUARY 2020

