



Club 39 interconnecting

(single leaf)



Timber Acoustic & Fire Rated Doorsets



Rw 55dB
CSTB 31629



EI30_{FD30} Class E
EITHER SIDE



Smoke Seal
S_a Classification
EN 13501-2 - BS EN 1634-3

Door Leaf

- 2 x CLUB 39 EI30 - 41dB doorset back to back
- Huet solid timber core
- Thickness: 40mm hardwood stiles all round
- Lippings
- Hardwood
- Concealed or exposed rebated lippings

Door Frame

- Hardwood
- Rebated monoblock frame
- Variety of widths
- Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

Choice of Door Facings

- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

Ironmongery

- 3 or 4 lift-off hinges - 140 x 70mm mild or stainless steel
- Cut-outs/mortices are available to suit a variety of locks and handles

Perimeter Seals

- Intumescent seals factory fitted (within the frame or leaf)
- Combined smoke and acoustic seals fitted within the frame and leaf
- Flat threshold 35 x 12mm



Tel: +33 22 812 0413
Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
W.R Quinan Boulevard, Paardevlei,
Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za

All sizes are in mm

FEBRUARY 2020






Club 39 interconnecting


(single leaf)



Timber Acoustic & Fire Rated Doorsets

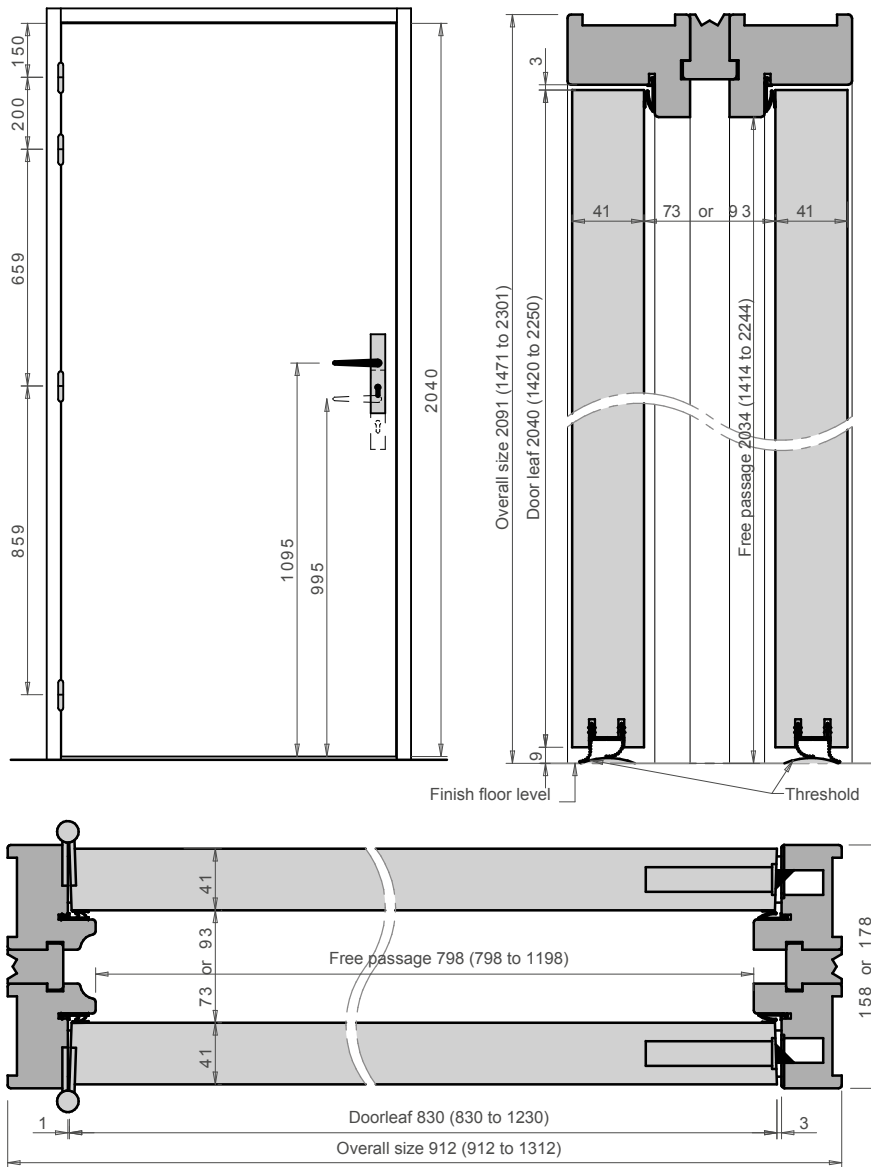

Flat threshold 35x12



Tel: +33 22 812 0413
 Rgd Office: JH INDUSTRIES
 30 rue Pauline de Lézardière
 85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
 W.R Quinan Boulevard, Paardevelei,
 Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za

All sizes are in mm

FEBRUARY 2020

