



Swinging EI60

(single and double leaf)

Timber Fire Rated Doorsets



EI60 FD60

EITHER SIDE - CTICM 06-A-331

Door Leaf

- Huet solid timber core
- Thickness: 51mm hardwood stiles all round

Door Frame

- Hardwood
- Monoblock frame
- Frame can be lacquered, stained or varnished

Choice of Door Facings


- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

Ironmongery


- Pivot in the upper crosspiece GROOM GRL 100
- Doors can be held in open position using electro-magnetic device (visible or built in the lintel). In the event of a fire, doors will assume closed position
- Access control option: Electromagnetic locking system which unlocks in the event of a fire

Perimeter Seals


- Intumescent seals factory fitted within the frame
- Anti finger trap joint within the frame




400x300




Ø360



1200x200



1200x300



1200x400



Tel: +33 22 812 0413
 Rgd Office: JH INDUSTRIES
 30 rue Pauline de Lézardière
 85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
 W.R Quinan Boulevard, Paardevlei,
 Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za

All sizes are in mm
 FEBRUARY 2020









Swinging EI60

(single and double leaf)

Timber Fire Rated Doorsets

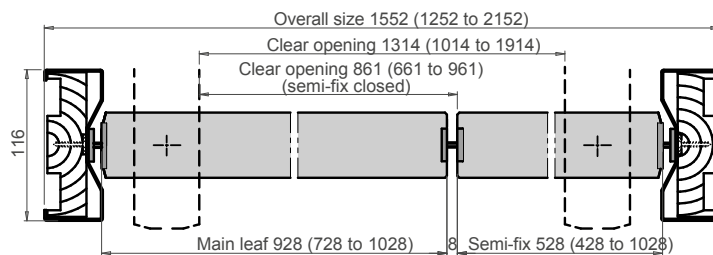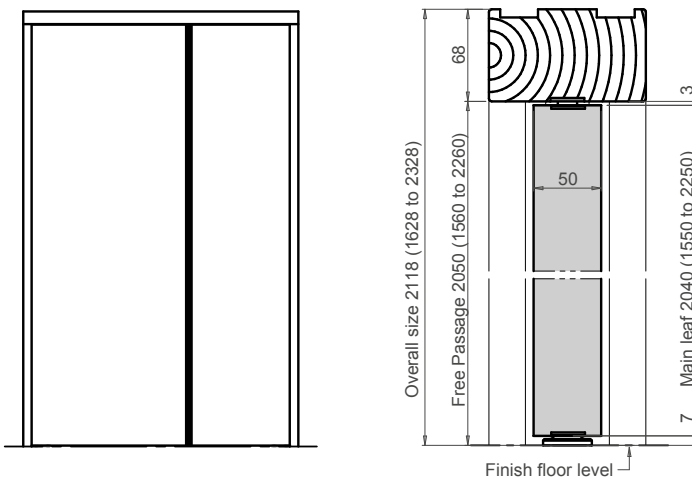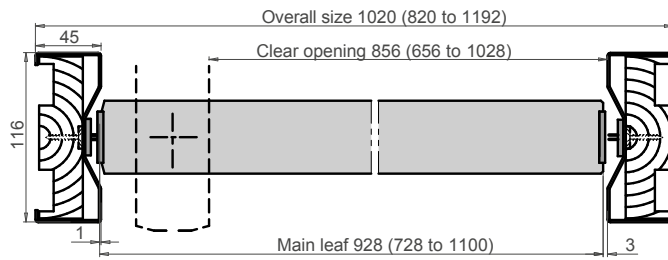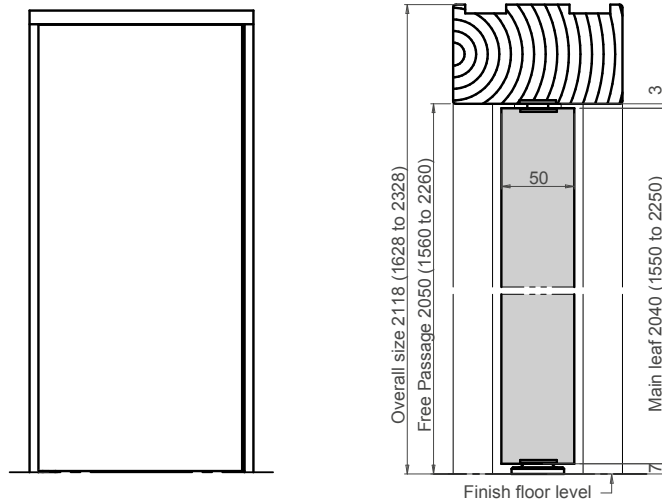

Tel: +33 22 812 0413
Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
W.R Quinan Boulevard, Paardevlei,
Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za

All sizes are in mm

FEBRUARY 2020

