



AXIOME 39 (single leaf)

Apartment entrance



Timber Acoustic & Fire Rated Doorsets



Rw 39dB
ACCORDING TO EN STANDARDS



EI30 FD30 Class E
EITHER SIDE ACCORDING
TO EN - BS STANDARDS



3c Stability*



Smoke Seal
S_a Classification
EN 13501-2 - BS EN 1634-3

Door Leaf

- HUET multi-layer acoustic & anti breaking core
- Thickness: 40mm concealed engineered beech stiles all round
- High stability leaf due to the inclusion of 2 steel sheets

Door Frame

- Engineered beech 98 x 51mm
- Rebated monoblock frame
- Extension linings available
- Frame can be stained, varnished or fully painted
- Frame can be wrapped with wood veneer to match door leaf facings

Choice of Door Facings

- Primed
- Wood veneers to match approved samples
- Laminated
- Engraved to a wide choice of standard and bespoke finishes
- Fully painted

Ironmongery

- Hinges: 4 lift-off hinges or 3 butt hinges
- Lock: Vachette 5000 SPN1 3 points
- Cylinder: Anti snap cylinder or standard cylinder
- Escutcheon: Anti breaking escutcheon or standard escutcheon
- Doorcloser option: Concealed doorcloser DORMA ITS96
- Spy hole (as an option)

Perimeter Seals

- Intumescent seals factory fitted
- Combined smoke and acoustic seals fitted within the frame and leaf
- Mechanical drop seal or Flat threshold 35 x 12mm

*Stability of the door leaf is an important factor, particularly in areas of temperature variance between rooms or between rooms and corridors. Any distortion of the door leaf will result in the seals not functioning correctly. With the inclusion of a minimum of 2 steel sheets and other materials, Huet door leaves offer less than 2mm of distortion. The result is a door leaf and seal which continues to perform even with wide temperature differences.



Tel: +33 22 812 0413
Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
W.R Quinan Boulevard, Paardevlei,
Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za



All sizes are in mm

FEBRUARY 2020





AXIOME 39 (single leaf)


Apartment entrance





Timber Acoustic & Fire Rated Doorsets

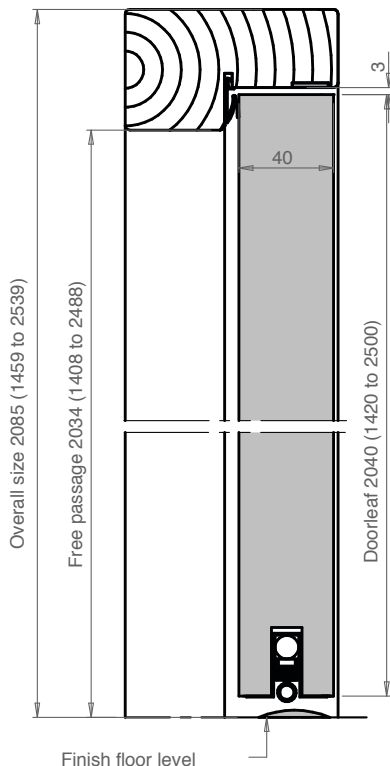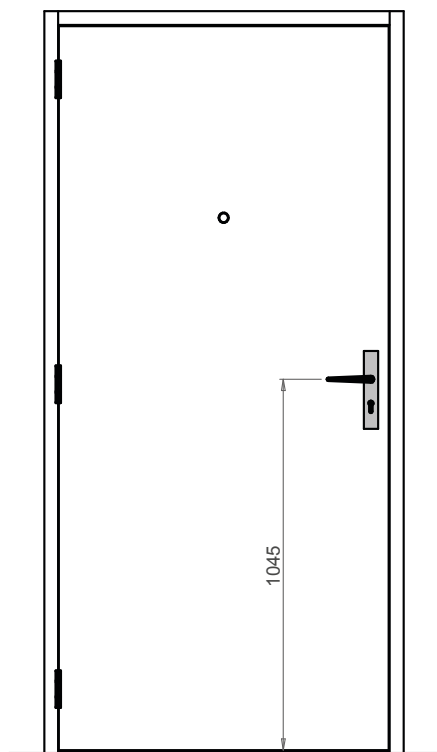

Flat threshold 35x12



Mechanical drop seal

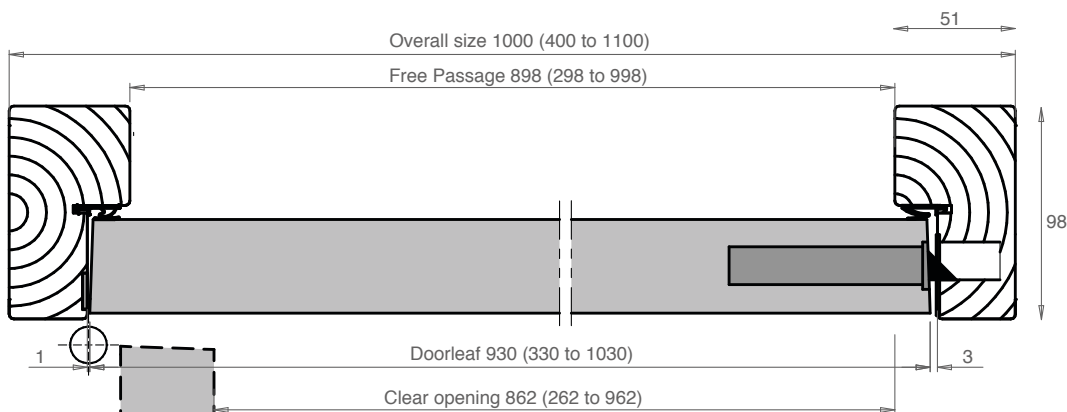

Tel: +33 22 812 0413
Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
W.R Quinan Boulevard, Paardevlei,
Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za

All sizes are in mm
FEBRUARY 2020

